

DRAGONFISH SERIES


MOVE BEYOND CONVENTION, COMMAND THE FUTURE






LONGER ENDURANCE, BETTER EFFICIENCY

ENDURANCE WITH PAYLOAD

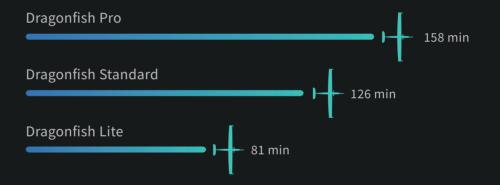

SAFETY AND REDUNDANCY

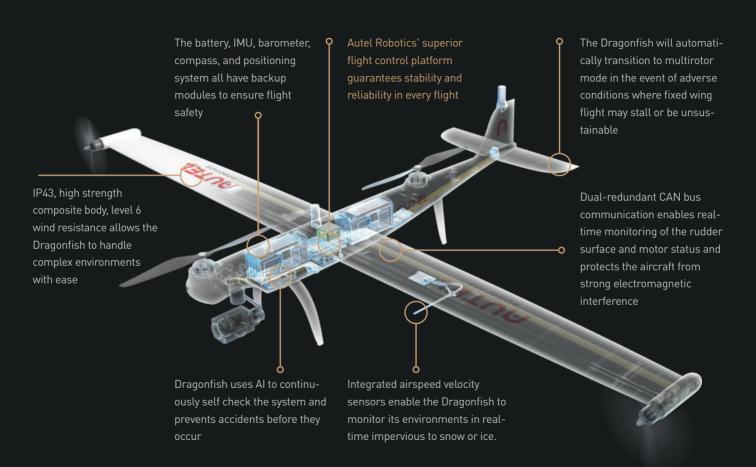


INTELLIGENCE AND AUTONOMY

The Dragonfish comes with a variety of automated functions to streamline and simplify mission tasks. Advanced algorithms add an additional of layer of consistency and simplicity for the user workflow.



ADS-B RECEIVER

DRAGONFISH IS ALSO ABLE TO NOTIFY THE OPERATORS ABOUT INCOMING MANNED AIRCRAFTS' POSITION, ALTITUDE AND SPEED THROUGH AN INTEGRATED ADS-B RECEIVER, DRAMATICALLY IMPROVING FLIGHT SAFETY.

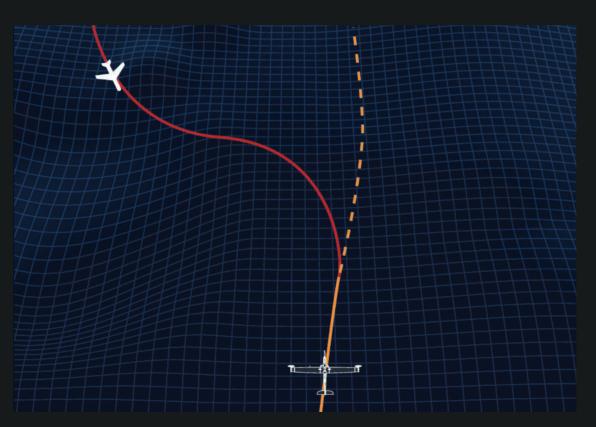

INTERCHANGEABLE PAYLOAD SYSTEM

The Dragonfish comes with a variety of payload options that can be changed rapidly to suit mission needs or to offer future expandability and versatility





- 4K 20x optical zoom
- 12m pixel wide angel camera
- 3 axis gimbal stabilization



DG-T3

- 4K 20x optical zoom
- 12m pixel wide angel camera
- 640x512 infrared camera
- 3 axis gimbal stabilization



DG-T3H

- · 12m pixel wide angel camera
- 1280×1024 infrared camera
- · Laser range sensor
- 3 axis gimbal stabilization

INTERCHANGEABLE PAYLOAD SYSTEM

The Dragonfish comes with a variety of payload options that can be changed rapidly to suit mission needs or to offer future expandability and versatility



DG-L20T

- 4K 20x optical zoom
- 12m pixel wide angel camera
- 640x512 infrared camera
- Laser range sensor
- 3 axis gimbal stabilization




DG-L50T

- 4K 50x optical zoom
- 12m pixel wide angel camera
- 1280x1024 infrared camera
- Laser range sensor
- 3 axis gimbal stabilization

^{*}Please refer to the specification page for details on payload compatibility.

APPLICATIONS

The Dragonfish's powerful platform and modular payload options gives it the flexibility to excel in a wide range of applications

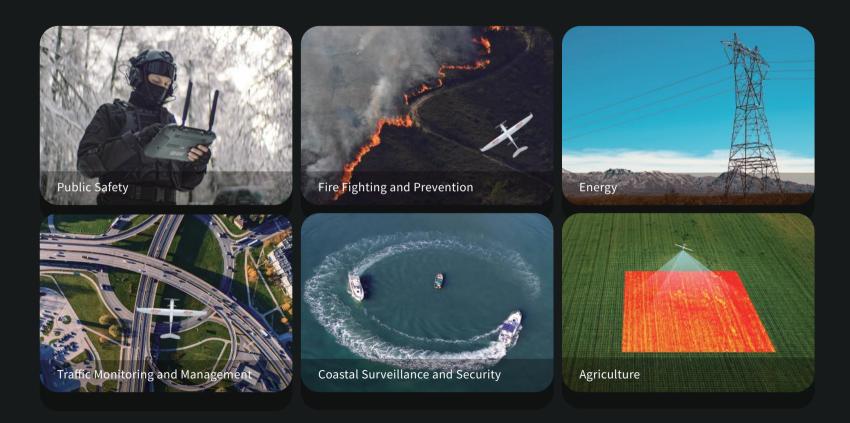



RTK MODULE



The Dragonfish is equipped with 2 RTK modules for additional redundancy. By integrating the GNSS Base Station with the RTK modules, the Dragonfish can achieve centimeter accuracy, precise headings and strong anti-magnetic interference capabilities. These modules back up one another and greatly improves the quality of image metadata for photogrammetry and increases flight precision and safety.

Autel Robotics' GNSS Base Station provides centimeter accuracy and supports all 4 major satellite systems

9.7"1000NIT ULTRA-BRIGHT GROUND CONTROL STATION

The high resolution (2048*1536), 9.7 inches, ultra-bright (1000 nits) TFT-LCD touchscreen ensures maximum visibility and practicality in all situations.



PROFESSIONAL SOFTWARE SOLUTIONS

Autel Voyager

Autel Voyager is specifically designed for the dragonfish for industry specific applications. The software provides advanced mission planning, intelligent tracking, flight history tracking, and other autonomous features. Simple to use yet incredibly powerful, Autel Voyager is the one stop solution for every mission.



COMPACT AND PORTABLE

The Dragonfish can be easily disassembled by a one man team and will fit in the back of typical car trunks.

The entire system can be assembled without tools and is ready to fly in less than 5 minutes.




The Dragonfish's fuselage is highly modular for easy packing and repair



The entire system self checks in 5 seconds upon startup and is ready to fly immediately after



Tool-Free Quick Release Propellers

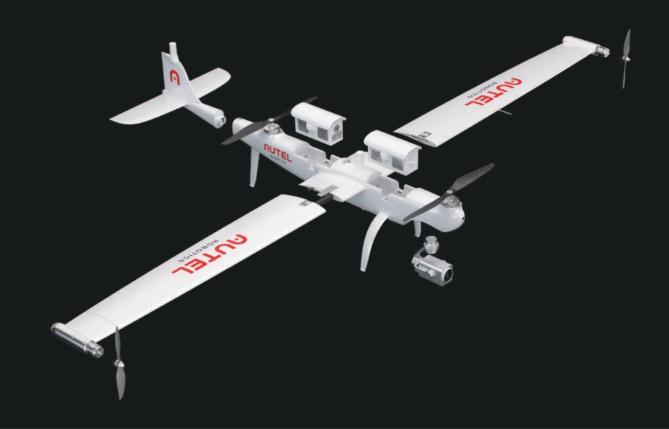

TECHNICAL SPECIFICATIONS







	Dragonfish Lite	Dragonfish Standard	Dragonfish Pro
SIZE	1600x950x350 mm	2300x1290x460 mm	3040x1650x460 mm
ENDURANCE (WITH PAYLOAD)	81 min	126 min	158 min
AIRCRAFT WEIGHT (W/O PAYLOAD)	4.5 kg	7.5 kg	14.5 kg
MAXIMUM PAYLOAD	1.0 kg	1.5 kg	2.5 kg
IP RATING	IP43	IP43	IP43
TRANSMISSION RANGE	30 km	30 km	30 km
WIND RESISTANCE	Level 6(Multirotor); Level 7(Fixed Wing)	Level 6(Multirotor); Level 7(Fixed Wing)	Level 6(Multirotor); Level 7(Fixed Wing)
MAXIMUM HEIGHT	4000 m	6000 m	6000 m
FLYING SPEED	0m/s~17m/s (Multirotor)	0m/s~17m/s (Multirotor)	0m/s~17m/s (Multirotor)
	17m/s~30m/s (Fixed Wing)	17m/s~30m/s (Fixed Wing)	17m/s~30m/s (Fixed Wing)
WORKING TEMPERATURE	-20 ~ 50°C	-20 ~ 50°C	-20 ~ 50°C
POSITION ACCURACY	1 cm+1 ppm (Multirotor)	3 cm+1 ppm (Multirotor)	1 cm+1 ppm (Multirotor)
	3 cm+1 ppm (Fixed Wing)	3 cm+1 ppm (Fixed Wing)	3 cm+1 ppm (Fixed Wing)
GNSS	GPS+GLONASS+Beidou+Galileo	GPS+GLONASS+Beidou+Galileo	GPS+GLONASS+Beidou+Galileo
SUPPORTED PAYLOADS	DG-Z2,T3,T3H,L20T	DG-Z2,T3,T3H,L20T	DG-Z2,T3,T3H,L20T,L50T



www.autelrobotics.com